


DIAGRAM

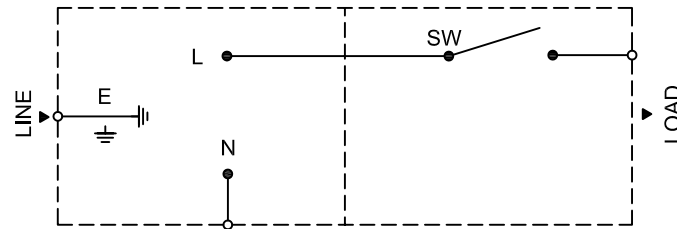

TOLERANCES UNLESS OTHERWISE 未指定容許差尺寸之公差	
BASIC DIMENSIONS TOLERANCES	
UP TO 10 (10以下)	±0.15
ABOVE 10 TO 30(10~30)	±0.3
ABOVE 30 TO 100(30~100)	±0.5
ANGULAR DIMENSIONS(角度)	±5°
DIMENSION UNIT	mm

SPECIFICATION

A: MATERIAL:

- 1.BODY: PC UL 94V-0
- 2.TERMINAL: Cu PLATED Sn
- 3.SWITCH

B: CHARACTERISTICS:

- 1.RATING: 15A 250V~(C-ULus)
10A 250V~(ENEC & CCC & KC)
- 2.INSULATION RESISTANCE:100MΩ MIN,AT 500VDC
- 3.ELECTRIC STRENGTH : 3000 VAC/1MIN,LEAKAGE CURRENT UNDER 0.5mA

C: APPROVALS: C-ULus, ENEC & CCC & KC

- D: MATERIAL USED MUST BE COMPLY WITH HQI-0010
- E: CAN MEET RoHS

東莞市華之力電子有限公司 DONGGUAN HCR ELECTRONICS CO., LTD.

2					核准	AaronJin	日期	20130528	投影法		機型	INLET SOCKET
1					校對	RZTang	日期	20130528	比例	1:1	型號	SK01
0	2013/04/27	新制訂	A0	WeiChen	AaronJin	繪圖	日期	20130528	路徑	E:\成品圖	料號	SK01-8201131623
NO	DATE	REVISION DESCRIPTION	REVISION	DRAWN	APPROVED	DRAWN BY	DATE	DATE	DWG NO	SK01\800212	ITEM NO	