

SPECIFICATION

A: MATERIAL:





- 1. BODY: NYLON 66 (Black)
- 2. TERMINAL: CU PLATED Sn
- 3. PIN: CU PLATED Ni

B: CHARACTERISTICS:





- 1. RATING: 2.5A 250V~(C-ULus, ENEC & CCC & KC)
- 2. INSULATION RESISTANCE: 100MΩ MIN./AT 500VDC
- 3. ELECTRIC STRENGTH : 3000 VAC/1MIN./LEAKAGE CURRENT UNDER 0.5mA

C: APPROVALS: C-ULus, ENEC & CCC & KC

D: MATERIAL USED MUST BE COMPLY WITH HQI-0010 E: CAN MEET ROHS,ROHS2.0,HF

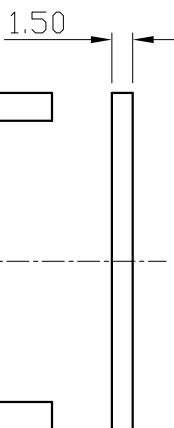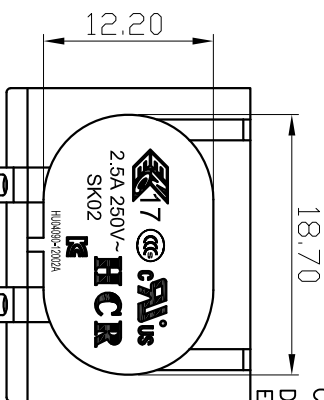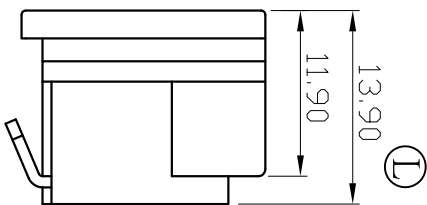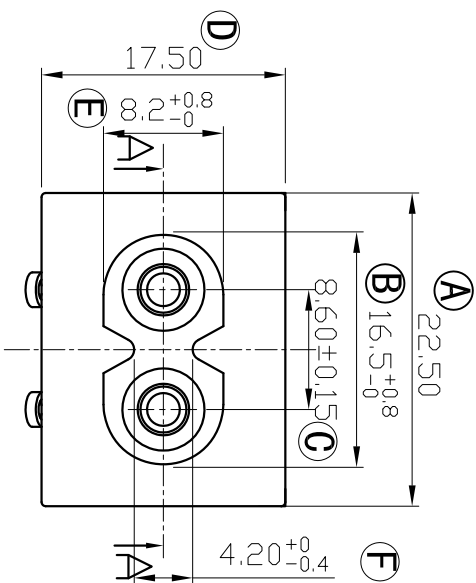

2.36±0.04 (G)

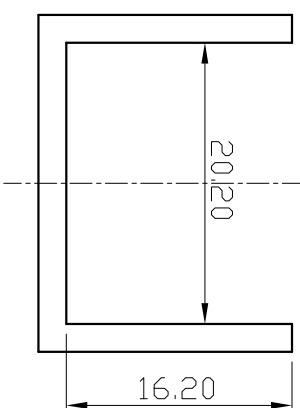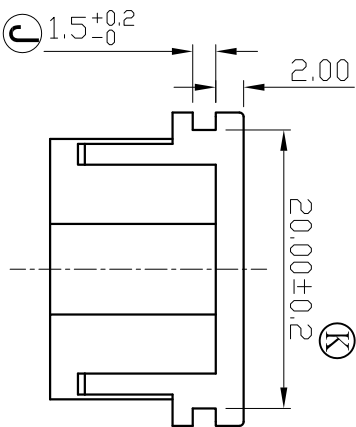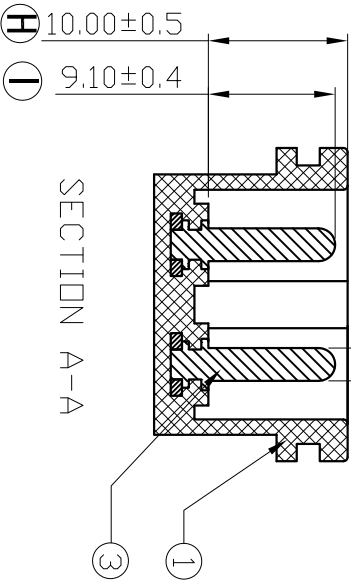

PANEL CUT-OUT

TOLERANCES UNLESS OTHERWISE	
未指定容許差尺寸之公差	
BASIC DIMENSIONS TOLERANCES	
UP TO 10 (10以下)	±0.1
ABOVE 10 TO 30(10~30)	±0.3
ABOVE 30 TO 100(30~100)	±0.5
ANGULAR DIMENSIONS(角度)	±5°
DIMENSION UNIT	mm

東莞市華之力電子有限公司 DONGGUAN HCR ELECTRONICS CO., LTD.

2																			
1																			
0	2012/11/2																		
NO	DATE	REVISION DESCRIPTION	REVISION	DRAWN	APPROVED	校對	日期	校對	日期	校對	日期	校對	日期	校對	日期	校對	日期	校對	日期

核准	Aaronim	日期	20110705	投影法	第一角	機型	INLET SOCKET
校對	RZTang	日期	20110705	比例	1:1	料號	SK02
繪圖	Weichen	日期	20110705	路徑	ISO22820008	料號	SK02-0601042221H
REVISION DESCRIPTION		REVISION	A0	DRAWN	Weichen	APPROVED	Aaronim