SPECIFICATION

A: MATERIAL:
- 1.BODY: PBT
- 2.TERMINAL: Cu PLATED Sn

B: CHARACTERISTICS:
- 1.RATING: 15A 250V~(C-ULus)
  10A 250V~(ENEC & CCC)
- 2.INSULATION RESISTANCE:100MΩ MIN,AT 500VDC
- 3.ELECTRIC STRENGTH : 3000 VAC/1MIN,LEAKAGE CURRENT UNDER 0.5mA

C: APPROVALS: C-ULus, ENEC & CCC

D: MATERIAL USED MUST BE COMPLY WITH HQI-0010

E: CAN MEET ROHS

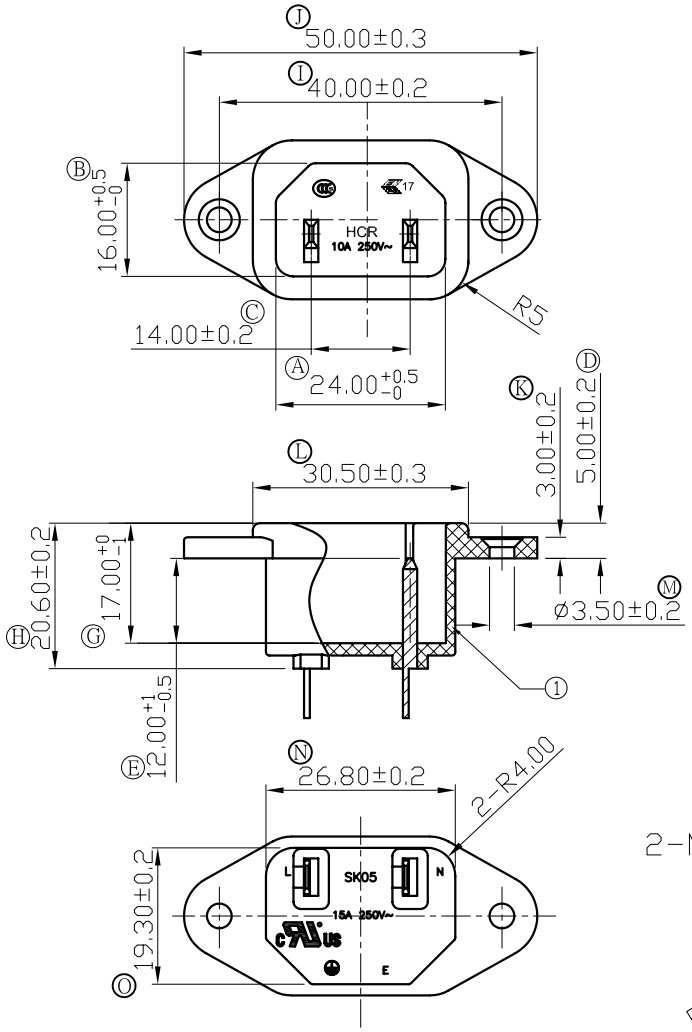

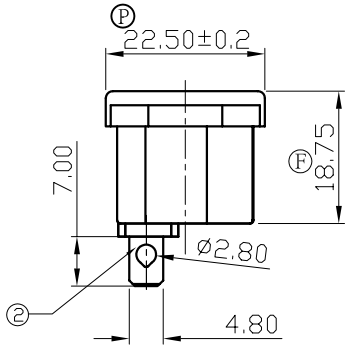

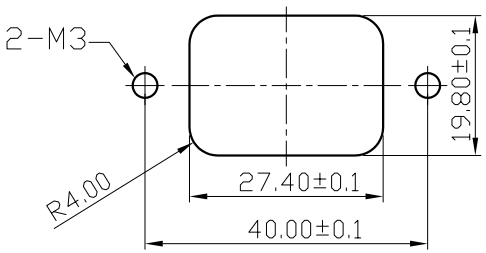

FOR FRONT MOUNTING USE
PANEL CUT-OUT

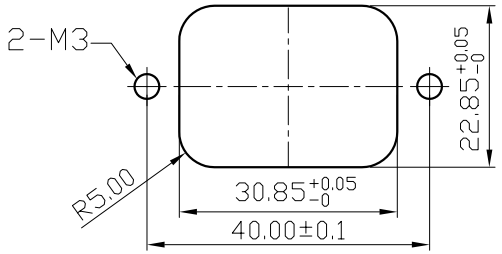

FOR REAR MOUNTING USE
PANEL CUT-OUT

TOLERANCES UNLESS OTHERWISE 未指定容許差尺寸之公差	
BASIC DIMENSIONS TOLERANCES	
UP TO 10 (10以下)	±0.15
ABOVE 10 TO 100(10~100)	±0.3
ABOVE 100 (100 以上)	±0.5
ANGULAR DIMENSIONS(角度)	±5°
DIMENSION UNIT	mm

NO	DATE	REVISION DESCRIPTION	ISSUE	REVISE	APPROVED
2					
1					
0	2013/05/15	新制訂	A0	KANG	RZTang

東莞市華之力電子有限公司 DONGGUAN HCR ELECTRONICS CO., LTD.

核准 APPROVED BY	AaronJin	日期 DATE	20130515	投影法 PROJECT		機型 PART NAME	INLET SOCKET
校對 CHECKED BY	RZTang	日期 DATE	20130515	比例 SCALE	1:1	型號 PART NO	SK05
繪圖 DRAWN BY	KANG	日期 DATE	20130515	路徑 DWG NO	E:\成品圖\SK05\850023	料號 ITEM NO	SK05-03011222